

BLUE STAR

Power Systems Inc.

Diesel Product Line

208-600 Volt

PD30-01IT4

60 Hz / 1800 RPM

30 kWe

Standby

Ratings

| | 240V | 208V | 240V | 480V | 600V |
|------------------------|--------------|--------------|---------------|--------------|--------------|
| Phase | 1 | 3 | 3 | 3 | 3 |
| PF | 1 | 0.8 | 0.8 | 0.8 | 0.8 |
| Hz | 60 | 60 | 60 | 60 | 60 |
| Generator Model | S1L2-N41 | S1L2-K41 | S1L2-K41 | S1L2-J41 | S1L2-J41 |
| Connection | 12 LEAD DD | 12 LEAD WYE | 12 LEAD DELTA | 12 LEAD WYE | 4 LEAD WYE |
| kWe | 30 | 30 | 30 | 30 | 30 |
| AMPS | 125 | 104 | 90 | 45 | 36 |
| Temp Rise | 125°C / 40°C | 125°C / 40°C | 125°C / 40°C | 125°C / 40°C | 125°C / 40°C |

Standard Equipment

Engine

- Radiator Cooled Unit Mounted (50°C)
- Radiator Duct Flange (OPU Only)
- Blower Fan & Fan Drive
- Starter & Alternator
- Oil Pump & Filter
- Oil Drain Extension w/Valve
- Governor - Electronic Isochronous
- 12V Battery System & Cables
- Air Cleaner (Dry Single Stage)
- Critical Grade Silencer Mounted
- Flexible Fuel Connector
- EPA Certified Tier IT4

Generator

- Brushless Single Bearing
- Automatic Voltage Regulator
- ± 1% Voltage Regulation
- 4 Pole, Rotating Field
- 125°C Standby Temperature Rise
- 100% of Rated Load - One Step
- 5% Maximum Harmonic Content
- NEMA MG 1, IEEE and ANSI Standards Compliance for Temperature Rise

Additional

- Single Source Supplier
- UL 2200 & cUL Listed
- CSA Certified
- Seismic Certified to IBC 2021
- NFPA 110 / CSA C282 Compliant
- Microprocessor Based Digital Control Panel Mounted in NEMA 12 Enclosure
- Base - Formed Steel
- Main Line Circuit Breaker Mounted & Wired
- Battery Charger 12V 6 Amp
- Jacket Water Heater -20°F 1000W 120V w/Isolation Valves
- Vibration Isolation Mounts
- 2 Year / 2000 Hour Standby Warranty
- Standard Colors - White / Gray

Application Data

Engine

| | | | |
|-----------------------|-------------------|--------------------------------------|---------------------------|
| Manufacturer: | Perkins | Displacement - Cu. In. (lit): | 135 (2.22) |
| Model: | 404D-22TAG | Bore - in. (cm) x Stroke - in. (cm): | 3.31 (8.40) x 3.94 (10.0) |
| Type: | 4-Cycle | Compression Ratio: | 23.3:1 |
| Aspiration: | Turbocharged, CAC | Rated RPM: | 1800 |
| Cylinder Arrangement: | 4 Cylinder Inline | Max HP Stby (kWm): | 48.8 (36.4) |

Exhaust System

Standby

| | |
|---|-------------|
| Gas Temp. (Stack): °F (°C) | 892 (478) |
| Gas Volume at Stack Temp: CFM (m³/min) | 297 (8.40) |
| Maximum Allowable Exhaust Restriction: in. H ₂ O (kPa) | 40.8 (10.2) |

Cooling System

| | |
|---|-------------|
| Ambient Capacity of Radiator: °F (°C) | 122 (50.0) |
| Maximum Allowable Static Pressure on Rad. Exhaust: in. H ₂ O (kPa) | 0.50 (0.12) |
| Water Pump Flow Rate: GPM (lit/min) | 14.8 (56.2) |
| Heat Rejection to Coolant: BTUM (kW) | 2154 (37.7) |
| Heat Radiated to Ambient: BTUM (kW) | 621 (10.9) |

Air Requirements

| | |
|---|--|
| Aspirating: CFM (m³/min) | 88.0 (2.49) |
| Air Flow Required for Rad. Cooled Unit: CFM (m³/min) | 2,544 (72.0) |
| Air Flow Required for Heat Exchanger/Rem. Rad. CFM (m³/min) | Consult Factory For Remote Cooled Applications |

Fuel Consumption

| | |
|--|-------------|
| At 100% of Power Rating: gal/hr (lit/hr) | 2.59 (9.80) |
| At 75% of Power Rating: gal/hr (lit/hr) | 1.83 (6.93) |
| At 50% of Power Rating: gal/hr (lit/hr) | 1.32 (4.98) |

Fluids Capacity

| | |
|---|-------------|
| Total Oil System: gal (lit) | 2.80 (10.6) |
| Engine Jacket Water Capacity: gal (lit) | 0.95 (3.60) |
| System Coolant Capacity: gal (lit) | 1.85 (7.00) |

Deration Factors: Rated Power is available up to 6562ft (2000m) at ambient temperatures to 104°F (40°C). Consult factory for site conditions above these parameters.

DCP7310 Control Panel

Standard Features





- Digital Metering
- Engine Parameters
- Generator Protection Functions
- Engine Protection
- CAN Bus (J1939) ECU Communications
- Windows-Based Software
- Multilingual Capability
- Remote Communications to DSE2548 Remote Annunciator
- 8 Programmable Contact Inputs
- 10 Contact Outputs
- RS485 Communicator Interface
- cULus Listed, CE Approved
- Event Recording
- IP 65 rating (with supplied gasket) offers increased resistance to water ingress
- NFPA 110 Level 1 Compatible



Weights / Dimensions / Sound Data


| | L x W x H | Weight lbs |
|----------------|------------------|------------|
| OPU | 80 x 38 x 51 in | 1,600 |
| Level 1 | 90 x 38 x 66 in | 2,100 |
| Level 2 | 90 x 38 x 66 in | 2,150 |
| Level 3 | 120 x 38 x 60 in | 2,250 |

Please allow 6-12 inches for height of exhaust stack.

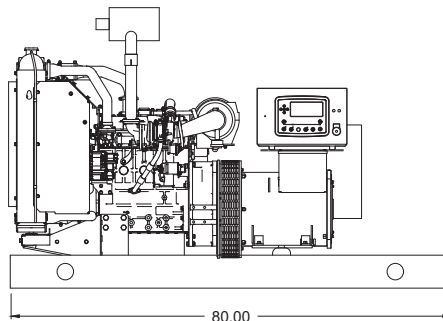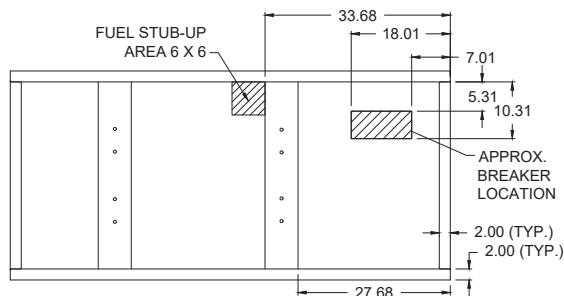

| | No Load | Full Load |
|----------------|---------|-----------|
| OPU | 71 dBA | 73 dBA |
| Level 1 | 65 dBA | 67 dBA |
| Level 2 | 61 dBA | 64 dBA |
| Level 3 | 59 dBA | 61 dBA |

Enclosures & Fuel Tanks

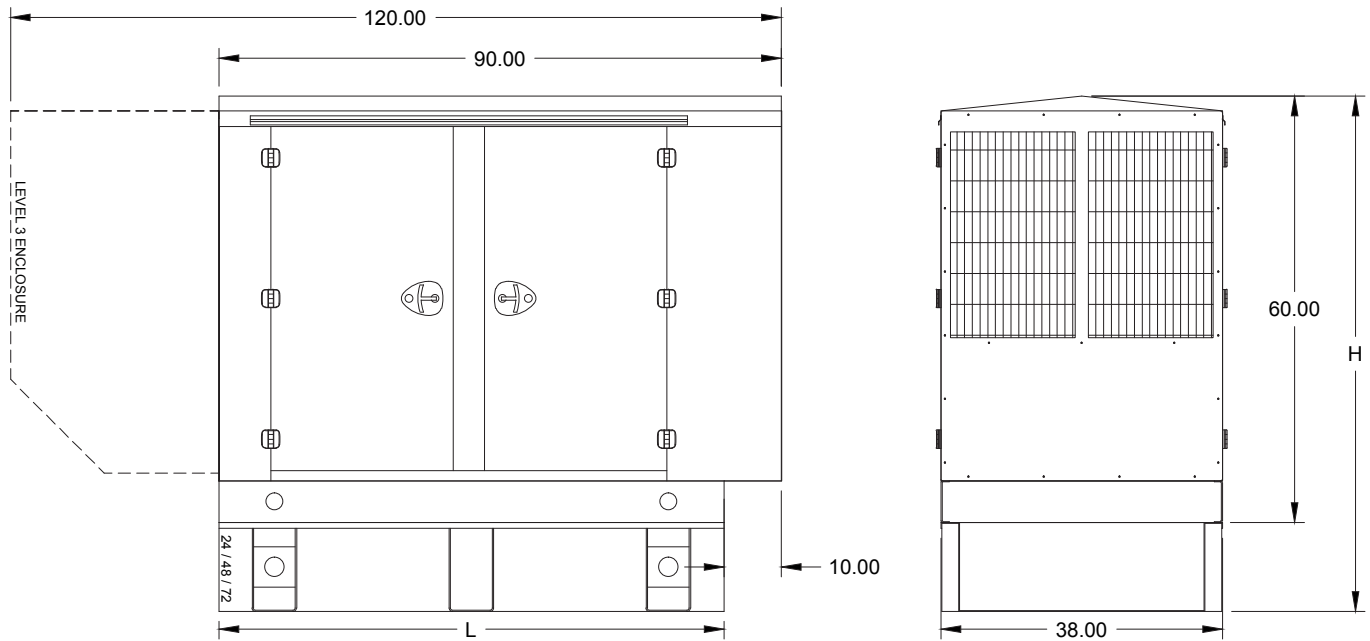

- All enclosure models are 200 MPH wind rating certified in accordance with IBC2021 and ASCE/SEI 7-16 standards.
- Level 2 & 3 enclosures include sound attenuation foam
- Level 3 enclosure includes frontal sound & exhaust hood.
- Enclosure height does not include exhaust stack.

| | 24 Hour 70 Gallon | 48 Hour 140 Gallon | 72 Hour 210 Gallon |
|----------|----------------------|-----------------------|-----------------------|
| L | 80.00 | 80.00 | 80.00 |
| H | 72.00 | 82.00 | 92.00 |

Notes

- All specification sheet dimensions are represented in inches.
- All drawings based on standard 480 volt standby generator. Lengths may vary with other voltages. All drawings and dimensions subject to change without notice.
- All enclosures and fuel tanks are based on the standard unit configuration. Any requested deviation can change dimensions.
- Sound data is measured at 23 feet (7 meters) in accordance with ISO 8528-10.
- All materials and specifications subject to change without notice.

American Owned



American Made

Blue Star Power Systems, Inc.

2250 Carlson Drive

North Mankato, Minnesota 56003

Phone + 1 507 345 1776

bluestarps.com

quote.bluestarps.com

sales@bluestarps.com